


HTX58

SPECIFICATIONS

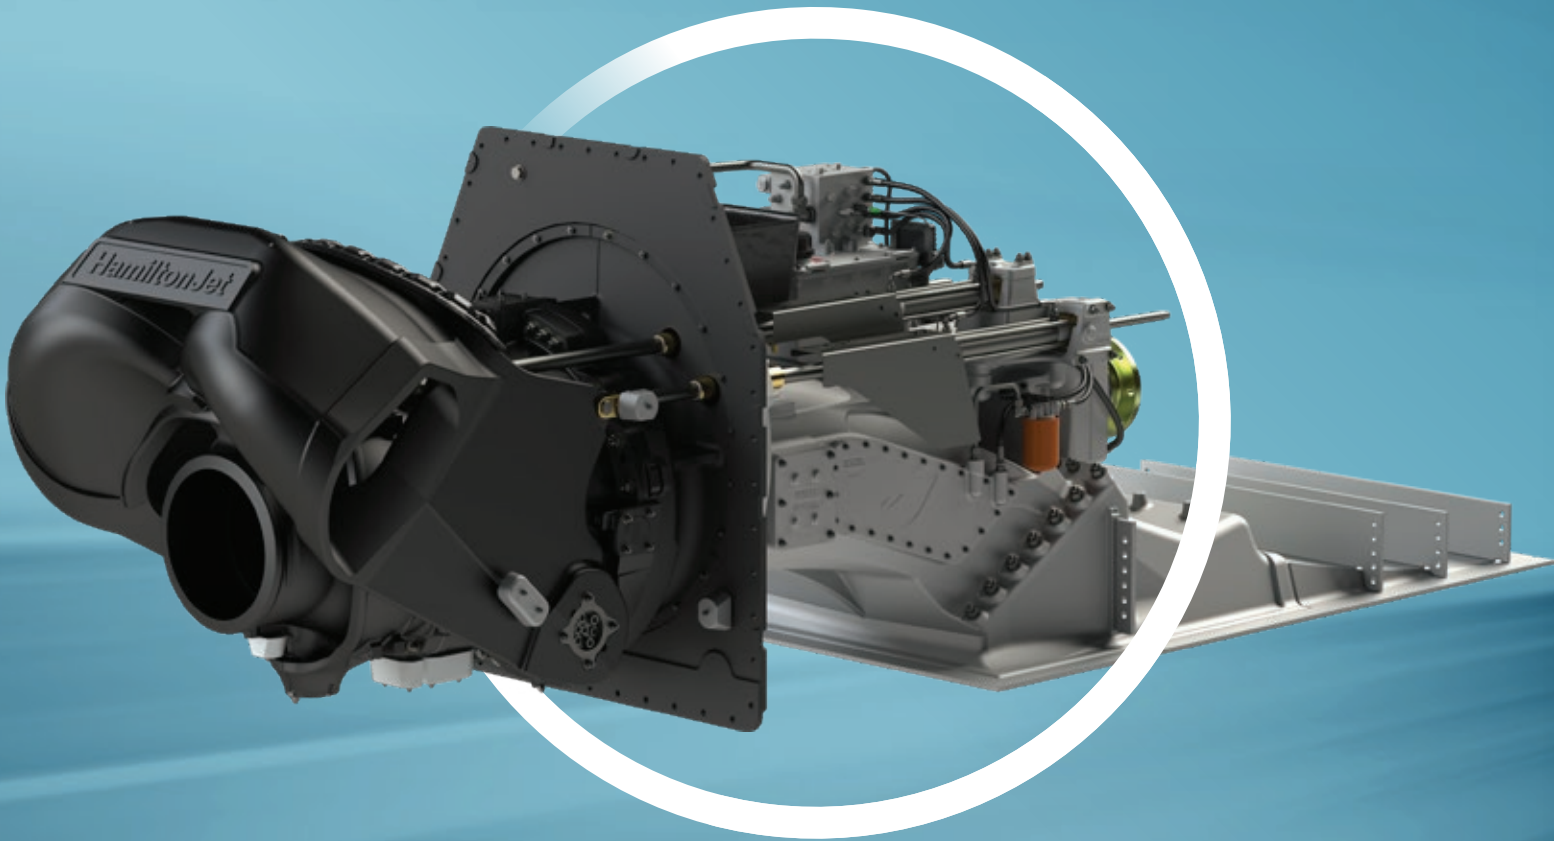


HamiltonJet

The Ultimate in Waterjet Sophistication


HTX58

SPECIFICATIONS

The HTX58 is the latest jet in the new generation of waterjets. The entire series features redefined performance, enhanced durability and easier installation.


HTX58 features:

- Max Input Power: 2491 kW / 3340 hp
- Max RPM: 1415 rpm
- Max Vessel Speed: 50+ knots
- Jet Type: Mixed flow
- Jet Weight – Dry: 1975 kg / 4353 lb
- Transition Duct Weight: 202 kg / 445 lb (Aluminium)
- Jet Construction: Marine Grade Aluminium / Duplex SS
- Shaft Angle: 0°
- Classification: DNV-GL, BV, ABS – Others on application
- New Hydrodynamic Design delivers 2.5% more High Speed Efficiency
- 4% Increase in Peak Bollard Pull
- 3 knots better minimum speed
- Enhanced corrosion protection
- Compact inboard footprint with fully integrated hydraulics
- Increased Impeller Rating Range for Compatibility with Wider Range of Engines
- AVX electronic controls

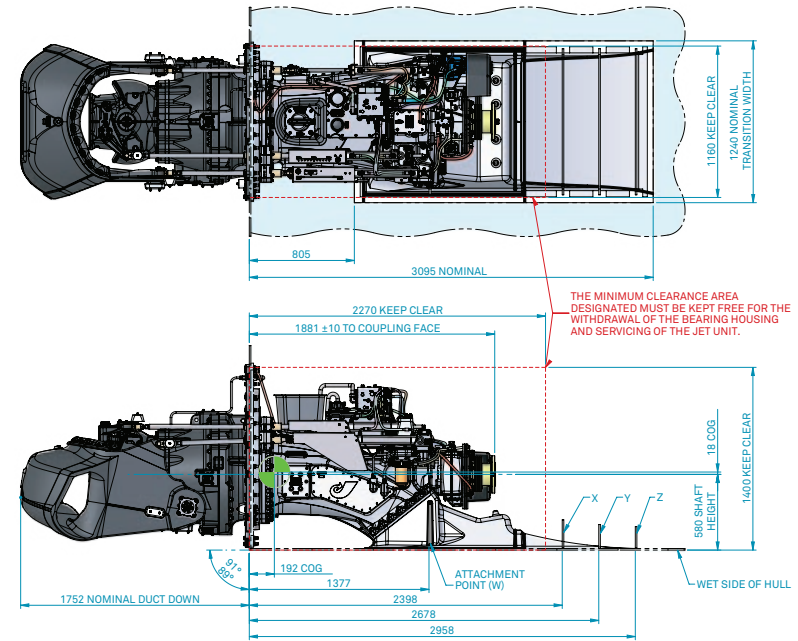

IMPORTANT NOTES: The HTX58 dimensions shown above are Indicative and Preliminary dimensions only for initial design purposes, and subject to change without notice or obligation. Please consult with the factory before using these preliminary dimensions for final installation requirements as these may have changed. Waterjet selection is determined by a range of hull and operational factors, most importantly vessel size and displacement (weight), and not necessarily by matching the above specifications to the desired engine power/RPM curve. In all cases you should consult HamiltonJet for assistance with waterjet selection.

COMPONENT	MATERIAL	STANDARD
Intake Block	EN AC 44100 Cast Marine Grade Aluminium	BS EN 1706
Intake Material	EN AC 44100 Cast Marine Grade Aluminium	BS EN 1706
Stator Material (without LEI)	EN AC 44100 Cast Marine Grade Aluminium	BS EN 1706
Nozzle Material	EN AC 44100 Cast Marine Grade Aluminium	BS EN 1706
Steering Deflector Material	EN AC 44100 Cast Marine Grade Aluminium	BS EN 1706
Astern Deflector Material	EN AC 44100 Cast Marine Grade Aluminium	BS EN 1706
Mainshaft Material	2205 Duplex Stainless Steel	ASTM 276
Wear Ring Material	2205 Duplex Stainless Steel	ASTM 240
Impeller Material	CF8M Cast Stainless Steel	ASTM A743
Anode Material	High Energy Aluminium (Internal and External)	

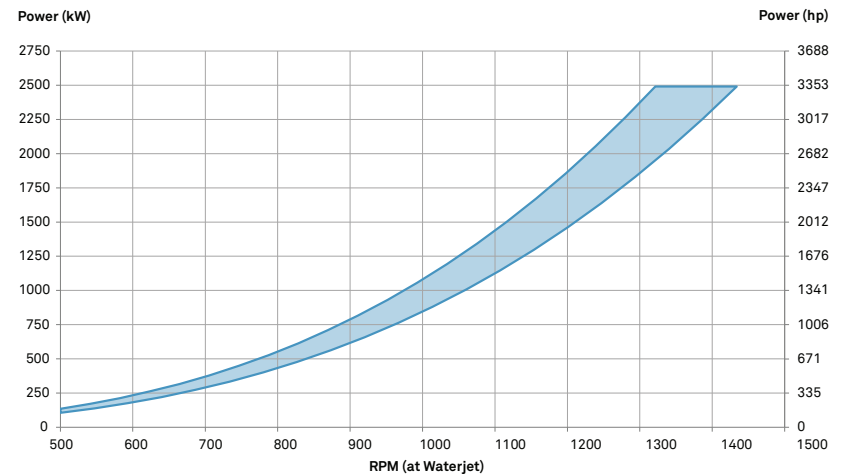

For TURB02 Impeller Power curve contact HamiltonJet